



■ BESPOKE DESIGN AND BUILD ■ FULLY AUTOMATIC LABELLING SYSTEMS ■ SEMI AUTOMATIC APPLICATORS
■ PRINT AND APPLY UNITS ■ DESK TOP PRINTERS AND INLINE CODERS ■ LABELS AND CONSUMABLES
■ CONTRACT LABELLING ■ SERVICING AND CONTRACTS ■ RENTALS

Linear Wrapround

Automatic labelling system for cylindrical or tapered containers

- The WRAPROUND labelling system can be used as a stand alone unit or part of an integrated production line. Patch or full wrapround labels can be applied to straightsided cylindrical and multi faced glass or plastic containers
- Labelling of tapered containers is made easier by the label head angle mount fitted as standard on all WRAPROUND systems. Plus with the addition of a vacuum pad, full wrap and partial wrap of tapered pots is made easy
- Conveyors can be supplied in various lengths and widths to suit the product. Infeed and Outfeed tables can be incorporated with product separators and bottle dividers
- The bottle rotation unit is adjusted by turnwheel for different diameter packs, thereby reducing changeover times. Backing pad has quick release facility for changing pad heights where labels are applied beneath tear tabs
- Label head can incorporate a small or large area thermal transfer printer, Hot foil coder or Ink Jet printer for the printing of batch numbers, expiry dates, barcodes, pricing information etc directly on to the label prior to application
- Labelling Speeds. 40 to 120ppm dependant of size of product & label




Linear Wraparound

TECHNICAL SPECIFICATION

Label head.....	120, 200, 250 & 300mm web widths, left or right handed. Label detection by p.e. cell or microswitch. Roll max, 240mm diameter, 45mm or 76mm ID cores
Conveyor.....	Width: 82mm upwards. Length: 2m upwards. Speed to suit product
Hot foil Coder (Optional)	Print areas 12mm x 30mm or 40mm x 28mm. Variable temperature, dual controls and ribbon indexing. Pneumatically operated
Thermal transfer Printer (Optional)	Print areas 30mm x 40mm, 50mm x 70mm & 128mm x 70mm. Label design software & consumables
Rotary tables.....	600mm & 900mm diameter in-feed tables with optional product separators & bottle dividers 600mm to 1500mm Out-feed tables available to suit any product
Options	Product Separator. Label counters, standard or pre-set to stop. Batch number and label verifiers. End of roll alarm/warning light
Services.....	220/240V AC. 50/60Hz, 600 watt. Clean compressed air, 6 bar max. 8 litre/min. (In-line Coder Option)

OPTIONS

- Max 76m/minute linear speed
- Encoder for automatic speed following/ label position
- 50 label programmable memory
- End of roll alarm/Warning light
- Hot foil or Thermal printers
- Bar code and vision system interface
- Service indicators
- Reject and missing label system
- Counters

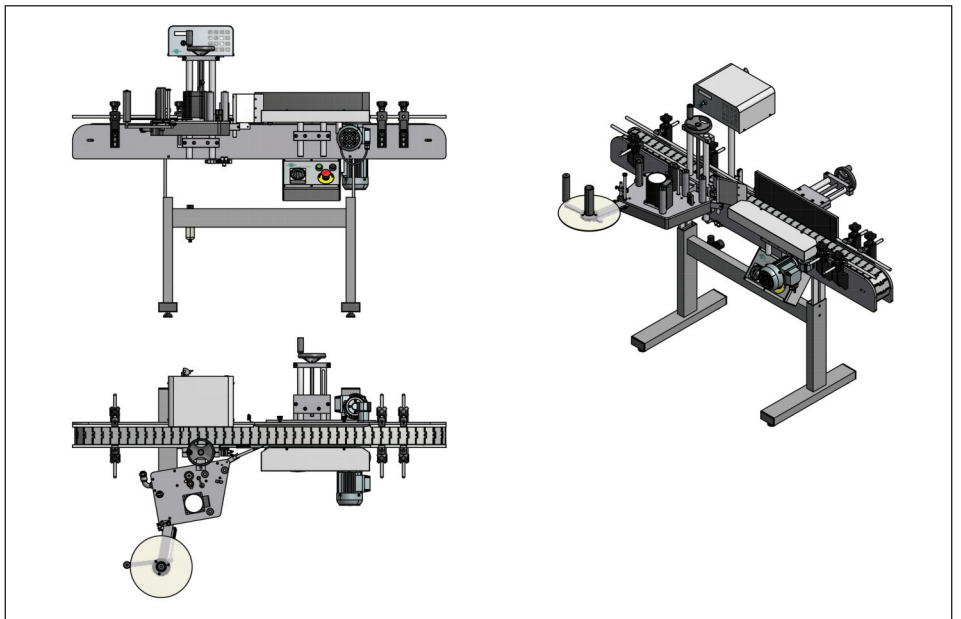

As part of our continuing policy of improvement we reserve the right to change this specification without notice.

Atwell
self-adhesive Labellers

**Whatever you produce,
Our machines will label it**

**Designed For
Your Application**

- Labelling Systems
- Labels & Consumables
- Contract Labelling



+44 (0) 1444 239970 • sales@atwell-labellers.co.uk • www.labeller.co.uk