

Linear Wraparound

ATWELL
LABELLERS

Automatic Labelling System for Cylindrical or Tapered Containers

Designed for
your application.



Why the Linear Wraparound?

- > Operate independently or integrate with a full production line.
- > High quality application with partial or full wrap-around label on plastic or glass containers.
- > Label head on an angle mount for easy labelling for tapered containers.
- > Easily adapt to different container diameters using a turnwheel.
- > Up to 150 passes per minute labelling speeds depending on product and label.
- > Add extras including a thermal inkjet or thermal transfer printer for batch codes and more.
- > Full systems including infeed and outfeed tables are available depending on your requirements.
- > Up to 25 stored programmable memory files for quick and accurate changeovers.

Linear Wraparound

ATWELL LABELLERS

Automatic Labelling System for Cylindrical or Tapered Containers

Technical Specification

Label head	120, 200, 250 & 300mm web widths, left or right handed. Roll max, 270mm diameter, 45mm or 76mm ID cores.
Conveyor	Width: 82mm upwards. Length: 1.6m upwards. Speed to suit product.
Thermal Inkjet Printer (Optional)	Print area 12mm x 150mm.
Thermal Transfer Printer (Optional)	Print areas 30mm x 40mm, 50mm x 70mm & 128mm x 70mm. Label design software & consumables.
Rotary Tables	600mm & 900mm diameter in-feed tables with optional product separators & bottle dividers 600mm to 1500mm Out-feed tables available to suit any product.
Services	220/240V AC. 50/60Hz, 600 watt. Clean compressed air, 6 bar max. 8 litre/min. (In-line Coder Option)

Options

Encoder for automatic speed following / label position

End of roll alarm/Warning light

Thermal inkjet or Thermal transfer printers

Bar code and vision system interface




Service indicators

Reject and missing label system

Counters

Sensors for clear and non transparent labels

PCL with HMI Control

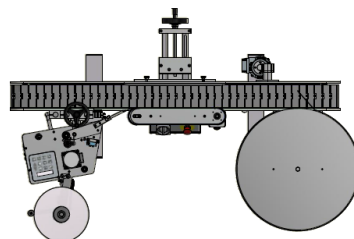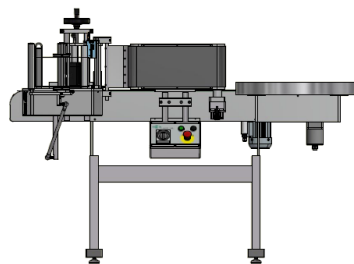

You produce it,
We label it.