

Print & Apply

Combined Printer & Label Head

ATWELL
LABELLERS

Designed for your application.



Why the Print & Apply Module?

- > Easily integrate in to an existing production line or as part of a full system for real-time printing of variable information at the point of production.
- > Utilises a range of print engines for clear printed information.
- > Accurate label placement and easy parameter setting.
- > Internal memory allows for up to 25 label type settings to be stored, saving time.
- > Tool free replacement and adjustment of printhead.
- > Utilise on a left or right handed production line.
- > The optional encoder can follow speed variations from conveyors.
- > Can be either top, side or bottom mounted

Print & Apply

Combined Printer & Label Head


ATWELL
LABELLERS

Technical Specification

Label head	Min web width 25mm. Max web width up 160mm (dependant upon printer model). Left or right handed. Min label length 15mm. Roll diameter 270mm, Min 40mm core.
Control	Stepper motor with processor, microprocessor with keyboard, illuminated display, password protection available. 9 languages.
Connectivity	Ethernet or wired connection for custom systems.
Services	230 VAC / 400W. 5°C to 40°C operating environment.

Options

Moveable dispenser beak
25 label programmable memory
End of roll alarm/Warning light
Signal for product separator
External interface signal I/O
Remote keypad
Sensors for clear and non transparent label

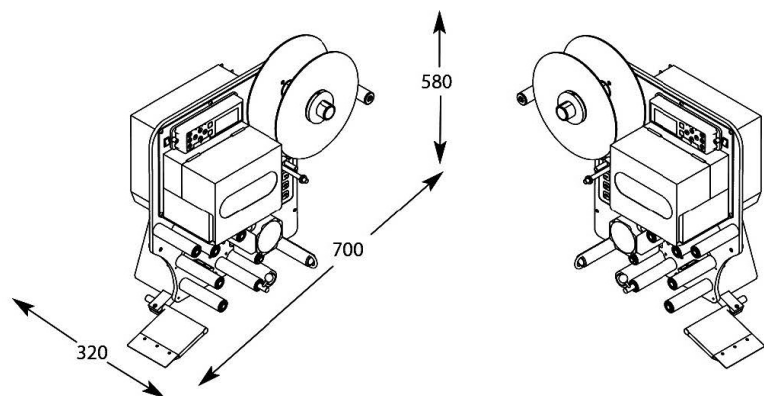

**You produce it,
We label it.**